




INSTALLATION INSTRUCTIONS




Warner Spot Magnet Wheel Brakes, Part no. 1102-15, are intended for use with an integral cast iron hub, drum and armature. For other possible uses, consult the factory.

1. Brakes are furnished as either left hand or right hand assemblies and are identified by the letter L or R on the back side. Replacement accessory kits can be installed in either assembly.

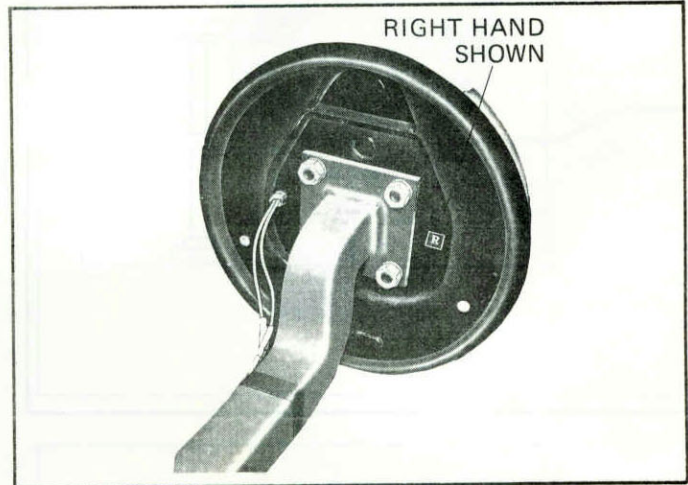

2. The brake is mounted on the axle flange with the magnet located towards the bottom of the brake.

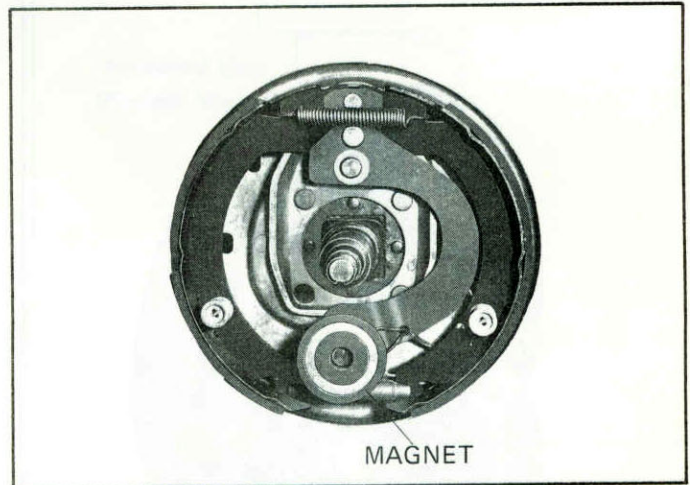

3. Tighten mounting nuts evenly with 75 to 80 foot lbs. torque. Be sure the pilot hole in the backing plate mates properly with the pilot on the axle flange so that the brake assembly is square when secured in place.

